

27

A13

13

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
8 January 2004 (08.01.2004)

PCT

(10) International Publication Number
WO 2004/002608 A1

(51) International Patent Classification⁷: B01D 39/20,
46/00, C04B 35/195

(74) Agent: GHEORGHIU, Anca, C.; Corning Incorporated,
SP TI 3 1, Corning, NY 14831 (US).

(21) International Application Number:
PCT/US2003/020454

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG,
UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 25 June 2003 (25.06.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/392,699 26 June 2002 (26.06.2002) US

(84) Designated States (*regional*): European patent (AT, BE,
BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU,
IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).

(71) Applicant: CORNING INCORPORATED [US/US]; 1
Riverfront Plaza, Corning, NY 14831 (US).


Published:

- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

(72) Inventors: BEALL, Douglas, M.; 39 Overbrook Rd.,
Painted Post, NY 14870 (US). MERKEL, Gregory, A.;
20 Woodland Dr., Big Flats, NY 14814 (US). MURTAGH,
Martin, J.; 4162 Swamp College Road, Trumansburg, NY
14886 (US).

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: MAGNESIUM ALUMINUM SILICATE STRUCTURES FOR DPF APPLICATIONS

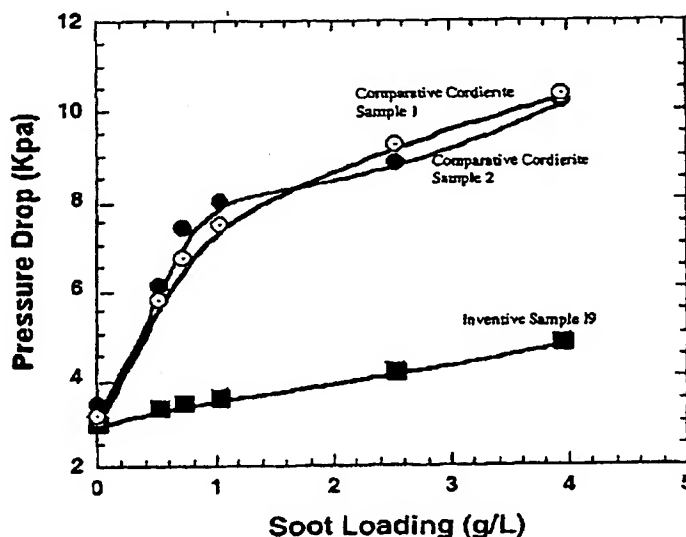

(57) Abstract: A ceramic filter for trapping and combusting diesel exhaust particulates composed of an end-plugged cordierite honeycomb structure exhibiting a pore size distribution as determined by mercury porosimetry in which the quantity $d_{50}/(d_{50} + d_{90})$ as related to pore size distribution is less than 0.70, a soot loaded permeability factor S_f , as defined by the equation $[d_{50}/(d_{50} + d_{90})]/[\% \text{porosity}/100]$, of less than 1.55, and, a coefficient of thermal expansion (25-800 C) of no greater than $17 \times 10^{-7}/^\circ\text{C}$. The ceramic filter further exhibits a median pore diameter, d_{50} , of at least 4 micrometers and up to 40 micrometers. A method of making the filter is provided.

WO 2004/002608 A1

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

**(19) World Intellectual Property
Organization
International Bureau**



1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1

(43) International Publication Date
8 January 2004 (08.01.2004)

PCT

(10) International Publication Number
WO 2004/002608 A1

(51) International Patent Classification⁷: B01D 39/20,
46/00, C04B 35/195

(74) Agent: GHEORGHIU, Anca, C.; Corning Incorporated,
SP TI 3 1, Corning, NY 14831 (US).

(21) International Application Number:
PCT/US2003/020454

(81) **Designated States (national):** AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VE, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 25 June 2003 (25.06.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/392,699 26 June 2002 (26.06.2002) US

(84) **Designated States (regional):** European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).

(71) Applicant: CORNING INCORPORATED [US/US]; 1 Riverfront Plaza, Corning, NY 14831 (US).


Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(72) **Inventors:** BEALL, Douglas, M.; 39 Overbrook Rd., Painted Post, NY 14870 (US). MERKEL, Gregory, A.; 20 Woodland Dr., Big Flats, NY 14814 (US). MURTAGH, Martin, J.; 4162 Swamp College Road, Trumansburg, NY 14886 (US).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: MAGNESIUM ALUMINUM SILICATE STRUCTURES FOR DPF APPLICATIONS

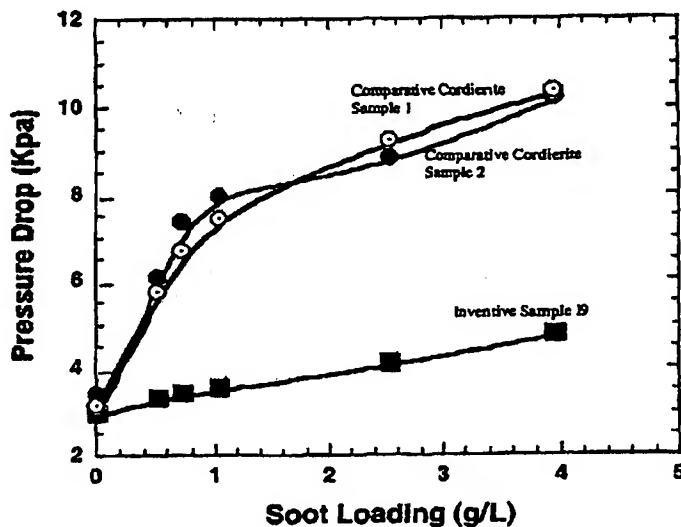

(57) Abstract: A ceramic filter for trapping and combusting diesel exhaust particulates composed of an end-plugged cordierite honeycomb structure exhibiting a pore size distribution as determined by mercury porosimetry in which the quantity $d_{50}/(d_{50} + d_{90})$ as related to pore size distribution is less than 0.70, a soot loaded permeability factor S_f , as defined by the equation $[d_{50}/(d_{50} + d_{90})]/\{ \%porosity/100\}$, of less than 1.55, and, a coefficient of thermal expansion (25-800 C) of no greater than $17 \times 10^{-7}/^{\circ}\text{C}$. The ceramic filter further exhibits a median pore diameter, d_{50} , of at least 4 micrometers and up to 40 micrometers. A method of making the filter is provided.

WO 2004/002608

PCT/US2003/020454

-1-

MAGNESIUM ALUMINUM SILICATE STRUCTURES FOR DPF APPLICATIONS

BACKGROUND OF THE INVENTION

[0001] The instant invention relates to magnesium aluminum silicate (MAS) type structures of low thermal expansion and optimized through-the-wall soot loaded permeability suitable for use in high temperature filtration applications. Specifically, the present invention relates to cordierite wall flow particulate filters having narrower pore size distributions and more interconnected porosity than commercially available cordierite wall flow filters.

[0002] A great deal of interest has been directed towards the diesel engine due to its efficiency, durability and economical aspects. However, diesel emissions have come under attack both in the United States and Europe, for their harmful effects on the environment and on humans. One of the biggest challenges in lowering diesel emissions is controlling the levels of diesel particulate material present in the diesel exhaust stream, which has been declared a toxic air contaminant.

[0003] Diesel particulate material is mainly carbon soot. One way of removing the carbon soot from the diesel exhaust is through diesel traps. The most widely used diesel trap is the diesel wall flow particulate filter which filters the diesel exhaust by capturing the soot on the porous walls of the filter body. The diesel particulate filter (DPF) is designed to provide for nearly complete filtration of soot without significantly hindering the exhaust flow. In the industry cordierite has been the cost-effective material of choice for DPFs due to its combination of excellent thermal shock resistance, filtration efficiency, and durability under most operating conditions.

[0004] As the layer of diesel particulate materials or carbon soot collects on the surfaces of the inlet channels of the filter, the lower permeability of the soot layer causes a gradual rise in the back pressure of the filter against the engine due to a pressure drop across the length of the filter. This causes the engine to work harder. Once the carbon soot in the filter has accumulated to some level, the filter must be regenerated by burning the soot to restore the

WO 2004/002608

PCT/US2003/020454

-2-

back pressure to low levels. The higher the pressure drop across the filter the higher the back pressure against the engine.

[0005] For a given filter size and cell geometry, the rate at which pressure drop increases with soot loading depends on how the soot interacts with the pores in the wall of the filter. Commercially available cordierite DPFs designed for truck engines exhibit high pressure drops, necessitating a reduction thereof. It has been observed that filters made from ceramics having well interconnected pores that span a narrow range in pore diameter exhibit a lower pressure drop at a given soot loading than filters that have a broad range in pore size (as determined by mercury porosimetry).

[0006] It would be considered an advancement in the art to obtain a cordierite diesel particulate filter with the pore size distribution and pore connectivity capable of maintaining lower pressure drops than has been possible so far with commercially available cordierite DPFs, while still exhibiting low thermal expansion. The present invention provides such a filter and a method of making the same.

SUMMARY OF THE INVENTION

[0007] The instant invention is founded upon the discovery of a magnesium aluminum silicate (cordierite) diesel particulate filter possessing an optimized through-the-wall soot loaded permeability which results in lower pressure drops than have been achieved with commercially available cordierite filters. The "through-the-wall soot loaded permeability" is the gas permeability through a porous ceramic wall of the filter when that wall has been exposed to sufficient soot accumulation such that the soot has begun to build up a soot layer, or cake, on the inlet surface of the wall. The through-the-wall soot loaded permeability will be lower than the permeability of clean wall prior to soot deposition if there has been some deposition of soot within the pores below the inlet surface of the wall.

[0008] Lower pressure drops are obtained by tailoring the microstructure with a narrower pore size distribution and a more interconnected porosity. It has been found that in the present cordierite bodies reduced anisotropy in pore morphology and better pore connectivity is achievable by the replacement of some or all of the platy talc with a less platy magnesium oxide (MgO) component in combination with the use of a non-platy silica component.

WO 2004/002608

PCT/US2003/020454

-3-

Further, the clay component is eliminated from the raw material mixture because it reacts unfavorably with the MgO to produce cordierite crystals that grow with their high-expansion crystallographic a-axes and b-axes in the plane of the filter wall which can lead to a high coefficient of thermal expansion in the final ceramic body. While pressure drops are lowered in the inventive filters, a low thermal expansion is still maintained to provide high thermal shock resistance.

[0009] Accordingly the inventive bodies are formed by a reaction of raw materials including MgO, alumina (Al_2O_3) and silica (SiO_2). Spinel may also be added. A pore former whether organic, such as starch, cellulose, and the like, or inorganic, such as, graphite, or a synthetic polymer, such as polyacrylate, polyethylene, and the like may also be included in the raw material batch. The batch is first plasticized and shaped, and then dried and fired to form a structure which is predominately of a phase approximating the stoichiometry of $\text{Mg}_2\text{Al}_4\text{Si}_5\text{O}_{18}$. The resulting ceramic honeycomb structure is then formed into a diesel particulate filter.

[0010] In a preferred embodiment the filter comprises a honeycomb design having an inlet end and an outlet end and a multiplicity of cells extending from the inlet end to the outlet end, the cells having porous walls, wherein part of the total number of cells at the inlet end are plugged along a portion of their lengths, and the remaining part of cells that are open at the inlet end are plugged at the outlet end along a portion of their lengths, so that an engine exhaust stream passing through the cells of the honeycomb from the inlet end to the outlet end flows into the open cells, through the cell walls, and out of the structure through the open cells at the outlet end.

BRIEF DESCRIPTION OF THE DRAWINGS

- [0011] FIG. 1 is a plot of $(d_{50}-d_{90})/d_{50}$ versus d_{50} for comparative and inventive samples.
- [0012] FIG. 2 is a plot of d_{90}/d_{50} versus d_{50} for comparative and inventive samples.
- [0013] FIG. 3 is a plot of $d_{50}/(d_{50}+d_{90})$ versus d_{50} for comparative and inventive samples.
- [0014] FIG. 4 is back-scattered scanning electron micrograph showing the microstructure of a commercially available cordierite DPF.

WO 2004/002608

PCT/US2003/020454

-4-

[0015] FIG. 5 is a back-scattered electron micrograph showing the microstructure of inventive example I9.

[0016] FIG. 6 compares the pressure drop as a function of carbon soot loading at a gas flow rate of 26.25 scfm, as measured at room temperature (25°C) for two comparative DPF samples (diameter of 2 in., length of 6 in., cell density of 200 cells/in.²; wall thickness of 0.022 in.), and an inventive DPF made according to the present invention (diameter of 2 in., length of 6 in., cell density of 200 cells/in.²; wall thickness of 0.022 in.).

DETAILED DESCRIPTION OF THE INVENTION

[0017] The present invention relates to a refractory ceramic structure or body which is predominately of a magnesium aluminum silicate phase, commonly known as cordierite. The inventive structure is particularly suitable in filtration applications, such as diesel exhaust filtration. The diesel particulate filter has preferably a body of a honeycomb structure which is obtained by extrusion.

[0018] Honeycombs of the present invention contain open cells which are formed by thin porous intersecting walls. The entirety of the open cells is enclosed by an outer wall which defines the shape of the body. The cells normally extend along the length of the body and occupy the entire length. There can be any number or density of cells. Preferably, the honeycombs have cell densities of at least 150 cells per square inch of frontal inlet area and a cell wall thickness of at least 0.012 inches.

[0019] A portion of the cells at the inlet end or face are plugged with a paste having same or similar composition to that of the filter, as described in U.S. Pat. No. 4,329,162 which is herein incorporated by reference. The plugging is only at the ends of the cells which is typically to a depth of about 5 to 20 mm, although this can vary. A portion of the cells on the outlet end but not corresponding to those on the inlet end are plugged. Therefore, each cell is plugged only at one end. The preferred arrangement is to have every other cell on a given face plugged as in a checkered pattern.

[0020] This plugging configuration allows for more intimate contact between the exhaust stream and the porous wall of the substrate. The exhaust stream flows into the substrate through the open cells at the inlet end, then through the porous cell walls, and out of the

WO 2004/002608

PCT/US2003/020454

-5-

structure through the open cells at the outlet end. Filters of the type herein described are known as "wall flow" filters since the flow paths resulting from alternate channel plugging require the exhaust being treated to flow through the porous ceramic cell walls prior to exiting the filter.

[0021] An advantage of the inventive filters is lower pressure drops than currently obtainable with commercially available cordierite DPFs. The pressure drop is a function of the accumulation of carbonaceous soot on the walls of the diesel particulate filter. As the amount of soot accumulated increases, it creates a progressive increase in the resistance to flow of the exhaust gas through the walls of the filter and carbon soot layer. This resistance to flow is manifested as a pressure drop that can be measured across the length of the filter, and results in an increased back pressure against the engine. The pressure drop increase at a given loading of soot (in grams/liter) is influenced by the porosity, the median pore diameter or size, the width of the pore size distribution, the pore connectivity, and the extent to which the soot penetrates the porosity of the filter walls.

[0022] In the inventive structures a low pressure drop (in kPa) is achieved through a combination of porosity and pore size distribution control, to result in an optimized through-the-wall soot loaded permeability. The pore size distribution, as determined by mercury intrusion porosimetry, is quantified in terms of d_{10} , d_{50} , and d_{90} which are the pore diameters at 10%, 50%, and 90% mercury intrusion. Thus, $d_{10} > d_{50} > d_{90}$. The breadth of the fines in pore distribution is of particular interest to the through-the-wall soot loaded permeability. This is because the larger amount of fine pores for a given median pore diameter can be an indication that the pore microstructure is comprised of larger pores that are interconnected by narrow pore necks. Mercury intrusion only measures the diameter of the pore neck leading into a larger pore, but gives no indication of the diameter of the larger pore itself.

[0023] The width of the fine tail of the pore size distribution is related to the difference between d_{50} and d_{90} . This can be expressed by the quantities $(d_{50}-d_{90})/d_{50}$, d_{90}/d_{50} and $d_{50}/(d_{50}+d_{90})$. Division by d_{50} serves to normalize the data such that two materials will have the same values if the widths of their pore size distributions appear similar by microscopy, but in which one material is of coarser overall microstructure, i.e., the microstructure of one look like a "magnified" version of the other.

WO 2004/002608

PCT/US2003/020454

-6-

[0024] For the inventive bodies, the term $d_{50}/(d_{50}+d_{90})$ has a value of less than 0.7, preferably less 0.65, and more preferably less than 0.60. The value of d_{90}/d_{50} is greater than 0.40, preferably greater than 0.55, and more preferably greater than 0.60, and the value of $(d_{50}-d_{90})/d_{50}$ is less than 0.60, preferably less than 0.50, and more preferably less than 0.40. The value of d_{50} pore diameter is at least 4 micrometers and up to 40 micrometers, preferably between 6 micrometers and 25 micrometers, and more preferably between 7 micrometers and 15 micrometers. Inventive bodies have a porosity, as measured in volume percent, at least 40% and less than 60%, preferably about 50%, and more preferably about 55%.

[0025] The pore size distribution together with the porosity of the inventive bodies satisfy the equation below which defines the soot loaded permeability factor, S_f :

$$S_f = [d_{50}/(d_{50} + d_{90})]/[\% \text{porosity}/100].$$

[0026] The soot loaded permeability, S_f has a value of less than 1.55, preferably between 0.83 and 1.40, more preferably between 0.83 and 1.35. It has been found that by satisfying the soot loaded permeability factor as described, inventive bodies maintain an especially low pressure drop during the accumulation of carbon soot within the filter. Although not intended to be bound by theory, it is believed that a narrow pore size distribution provides a greater pore connectivity together with a relatively low porosity serve to minimize penetration of the soot into the pores of the filter wall, and promote the formation of a layer or "cake" of soot on the surfaces of the walls of the inlet channels even at very low soot loadings. This is generally known as surface filtration, as compared to the so-called deep bed filtration, which involves penetration of the soot into the pores of the filter walls. Surface filtration is preferred because the cake or soot layer can be burned more easily and quickly when at the surface of the filter walls.

[0027] Because the pores are well interconnected, the body has a higher permeability and lower pressure drop than a filter having a similar median pore diameter and total porosity, but with a broader pore size distribution. When the median pore diameter is greater than about 20 microns or the total porosity is greater than about 50%, it may be possible for soot to penetrate more deeply into the pores in the walls of the filter. However, due to the improved pore connectivity of the inventive filters, it is believed that the soot which enters the pores is not as detrimental at reducing the permeability of gas through the wall because there are many more alternative passageways for the flow of gas through the wall.

WO 2004/002608

PCT/US2003/020454

-7-

[0028] Another advantage in the inventive bodies is a low thermal expansion resulting in excellent thermal shock resistance (TSR). TSR is inversely proportional to the coefficient of thermal expansion (CTE). That is, honeycomb structures with low thermal expansion have good thermal shock resistance and can survive the wide temperature fluctuations that are encountered in application. Accordingly, the coefficient of thermal expansion from room temperature (RT) to 800°C, as measured by dilatometry, is no greater than about $17 \times 10^{-7}/^{\circ}\text{C}$, preferably less than $10 \times 10^{-7}/^{\circ}\text{C}$, and more preferably less than $5 \times 10^{-7}/^{\circ}\text{C}$.

[0029] The inventive structure is suitable for both low and high volumetric heat capacity filters. High volumetric heat capacity is often desirable because it reduces the magnitude of the temperature increase of the filter during regeneration. Accordingly, it is preferred to have a filter volumetric heat capacity of at least $0.67 \text{ J cm}^{-3} \text{ K}^{-1}$ as measured at about 500°C. Preferably, the filter volumetric heat capacity at 500°C is at least $0.76 \text{ J cm}^{-3} \text{ K}^{-1}$, and more preferably at least $0.85 \text{ J cm}^{-3} \text{ K}^{-1}$. Alternatively, low volumetric heat capacity is sometimes desirable because it enables the filter to regenerate more frequently and with lower amounts of accumulated soot without requiring large inputs of thermal energy to raise the temperature of the filter to that required to initiate regeneration.

[0030] The invention also relates to a method of fabricating the filter structures by reaction of raw materials selected from the group consisting of magnesium oxide, alumina, and silica components. Spinel may be optionally included. If included the spinel component has the stoichiometry MgAl_2O_4 . The raw material batch optionally includes a pore former that is preferably a particulate material selected from the group consisting of graphite, cellulose, starch, synthetic polymers such as polyacrylates and polyethylenes, and combinations thereof.

[0031] The weight percent of the pore former is computed as: $100 \times [\text{weight of pore former} / \text{weight of cordierite-producing raw materials}]$. Graphite and corn starch are preferred pore formers. The median particle diameter of the pore former is at least 3 micrometers and not more than 140 micrometers, preferably at least 5 micrometers and not more than 80 micrometers, and more preferably at least 10 micrometers and not more than 50 micrometers. When the silica source has a median particle diameter greater than 20 micrometers, the pore former must have a median particle diameter of not more than 100 micrometers.

WO 2004/002608

PCT/US2003/020454

-8-

[0032] The magnesium oxide is supplied by a MgO-forming source which is typically magnesium oxide, magnesium hydroxide, magnesium carbonate, magnesium nitrate, or combinations of these. The alumina is supplied by an Al_2O_3 -forming source which when heated to a sufficiently high temperature in the absence of other raw materials, yields substantially pure aluminum oxide, and can be aluminum oxide, aluminum hydroxide, hydrated alumina, alpha alumina, a transition alumina such as gamma-alumina or rho-alumina, boehmite, aluminum nitrate, aluminum carbonate or combinations of these. The silica is supplied by a silica-forming source, including quartz, cristobalite, non-crystalline silica such as fused silica or a sol-gel silica, zeolite, colloidal silica, alpha quartz, and mixtures thereof. The silica source has an average particle size of at least about 4 micrometers, and preferably greater than about 10 micrometers.

[0033] The raw material mixture is intimately blended with a vehicle and forming aids which impart plastic formability and green strength to the raw materials when they are shaped into a body. Since forming is by extrusion, extrusion aids are used, most typically methyl cellulose which serves as a binder, and sodium stearate, which serves as a lubricant. The relative amounts of forming aids can vary depending on factors such as the nature and amounts of raw materials used, etc. Forming aids are added as superadditions based on the total weight of the raw materials. In one embodiment, extrusion aids and amounts include 2% to 10% by weight of methyl cellulose, and preferably 3% to 6% by weight, and 0.5% to 1% by weight sodium stearate, and preferably 0.6% by weight.

[0034] The raw materials and the extrusion aids are mixed together in dry form and then mixed with water as the vehicle. The amount of water can vary from one batch of materials to another and therefore is determined by pre-testing the particular batch for extrudability.

[0035] The raw materials in the resulting plastic mixture are then formed into a green body. Bodies which have not been sintered are referred to as green bodies. Extrusion techniques are well known in the art. The green bodies are dried and then fired at a sufficient temperature and for a sufficient time to form the final product structure. The firing is preferably done at a rate of between 15 and 100°C/hour to a maximum temperature of about 1405°C to 1430°C, and with a hold at top temperature for 6 to 25 hours. The compositions of the present invention result in formation of a ceramic structure which is predominately of a phase approximating the stoichiometry $\text{Mg}_2\text{Al}_4\text{Si}_5\text{O}_{18}$.

WO 2004/002608

PCT/US2003/020454

-9-

[0036] To more fully illustrate the invention, the following non-limiting examples are present below. All parts, portions and percentages are on a weight bases unless otherwise stated.

Examples

[0037] Table 1 presents the raw materials utilized in preparing the samples herein. Comparative (non-inventive) examples are recorded in Tables 2. Inventive examples are listed in Tables 3 and 4. Table 5 presents a pressure drop comparison between a filter prepared in accordance with the present invention, and two comparative cordierite DPFs.

[0038] In preparing the samples, inorganic powders were weighed together with solid organic binders and lubricants into a Nalgene® jar and mixed on a Turbula® mixer for 20 minutes. The dry ingredients were transferred to a muller where any liquid organics and water were gradually added and the mixture mulled to a plastic consistency.

[0039] The mulled batch was extruded three times as spaghetti, then formed into one-inch diameter or two-inch diameter, 200 cell/in², 0.019-0.022" wall honeycomb. For some compositions, 5/16" rod and 0.020" ribbon were also extruded. One-inch diameter honeycomb was wrapped in aluminum foil while the rod was placed inside a glass tube with the ends loosely covered with foil. The ribbon was cut into 1.5 inch long segments, placed between layers of foil, and covered with a weight to ensure flatness. Two-inch diameter honeycomb was partially dried, without wrapping, in a dielectric dryer. All extrudates were then dried for one to three days in an oven at 95°C.

[0040] Extruded samples were placed on alumina setter sand in alumina boxes. Inventive examples I1 to I6 were fired in an electric kiln at 50°C/hour to a maximum temperature of 1400° or 1425°C and held for 10 or 25 hours before cooling by shutting off power to the furnace. Examples I7 to I9 were fired to 1430°C and held for 25 hours. Comparative examples were fired to 1405°C. Hold times and temperatures are reported in Tables 2-4.

[0041] Porosity of the fired ware was characterized by mercury intrusion porosimetry, CTE by dilatometry measured along the axial (extrusion) direction, and secondary phases (mullite, corundum, and spinel) by quantitative powder x-ray diffractometry. Transverse I-ratios were measured as described in US patent number 5,258,150. MOR, where measured, was by four-point loading on the solid rod. Permeability was measured on pieces of extruded ribbon using a Perm Automated Porometer® Version 6.0 (Porous Materials, Inc., Ithaca,

WO 2004/002608

PCT/US2003/020454

-10-

NY). Permeability values are expressed in units of μm^2 . The "Darcy," another unit of permeability, is equal to $0.987 \mu\text{m}^2$. All percentages are weight percents, and all pore sizes and particles sizes are in microns (10^{-6} meter).

[0042] The pressure drop across the two-inch diameter, six-inch long cellular filter bodies was measured as follows. Each filter was wrapped in a ceramic fibrous mat and securely encased in a cylindrical metal holder. The holder and filter were attached at each end to metal pipes through which a stream of air was passed. The pressure drop across the filter, that is, the pressure difference between the inlet and outlet faces, was measured as a function of gas flow rate. Flow rates of 1.9 to 26.25 standard cubic feet per minute (scfm) were utilized for all examples. The pressure drops for these examples, prior to the introduction of carbon particles into the filters, are referred to as the "clean" pressure drops, and these clean pressure drops increase with increasing flow rate.

[0043] After the clean pressure drops were measured, the samples were transferred to a second laboratory facility where they were again attached to a metal pipe into which a stream of air was passed at a flow rate of about 13 scfm. A very fine "artificial" carbon was then aspirated into this air stream for a period of time, thereby partially loading the filter with carbon by coating the walls of the inlet channels with a layer of carbon particles. The "artificial" carbon used in the laboratory experiments is commercially available copier toner. For purposes of the present invention this "artificial" carbon will be referred to as carbon or carbon soot.

[0044] The sample was then taken back to the first apparatus and its pressure drop re-measured as a function of flow rate. This process was repeated for various increasing levels of carbon soot loading. Thus, pressure drops were determined as a function of flow rate and mass of carbon soot contained within the filter. In most cases, levels of carbon soot loading ranged from approximately 0.3 to 5.0 grams per liter of filter volume. The conditions of the test method described above are meant to provide a relative comparison of the behaviors of the filters in environments of flowing gas and carbon soot build-up on the walls of the filter, analogous to the environment that a filter would experience if placed in the exhaust path of a diesel engine. To minimize reduction in engine performance, it is desired that the pressure drop of a filter that is loaded with a given mass per volume of carbon soot be as low as

WO 2004/002608

PCT/US2003/020454

-11-

possible. Pressure drop data in Table 5 and Figure 6 were measured at a flow rate of 26.25 scfm, at room temperature of 25°C.

[0045] Comparative Examples C1 to C3 are provided according to the teachings of U.S. Patent No. 5,258,150. Comparative Example C4 is a cordierite ceramic based upon raw materials comprising an MgO-forming source, an Al_2O_3 -forming source, and a silica source, that does not meet one or more of the property requirements.

[0046] Figures 1 to 3 illustrate the pore size distribution of comparative examples made with clay and talc, and without an MgO-forming source (open circles) in comparison to inventive examples (filled circles). It can be observed that bodies based upon raw material mixtures containing talc and clay and absent an MgO-forming source possess a much broader pore size distribution than the inventive examples based upon a raw material mixture comprised of an MgO-forming source, an alumina-forming source, and a silica-forming source.

[0047] A back-scattered scanning electron micrograph of a commercially available cordierite diesel particulate filter made with clay and talc, and without an MgO-forming source is provided in Figure 4. The "ragged" microstructure is typified by anisotropic, angular pores having very jagged surfaces and exhibiting a broad range in pore size. Large pores are frequently connected only by narrow pore necks.

[0048] In Figure 5 the microstructure of inventive example I9 is shown. The inventive examples based upon a raw material mixture comprised of an MgO-forming source, an alumina-forming source, and a silica-forming source possess a much narrower pore size distribution than the comparative examples based upon raw material mixtures containing talc and clay that are absent of an MgO-forming source. The microstructure is less anisotropic and has a much smoother pore-wall surface.

[0049] A comparison of pressure drop and selected physical properties is provided in Table 5 for two comparative cordierite DPFs, commercially available from Corning Incorporated, and a filter fabricated according to the present invention (example I9 in Table 4). The samples have a cell density of 200 cells per square inch and a wall thickness of 0.016 and 0.022 inches. The pressure drop was measured for carbon soot loadings varying from zero to 4 g/L at a flow rate of 26.25 scfm. Figure 6 illustrates graphically the pressure drop

WO 2004/002608

PCT/US2003/020454

-12-

versus carbon soot loading. As it can be seen the inventive sample I9 has the lowest pressure drop at all loadings of carbon soot, in comparison with the comparative cordierite DPFs.

[0050] It should be understood that while the present invention has been described in detail with respect to certain illustrative and specific embodiments thereof, it should not be considered limited to such but may be used in other ways without departing from the spirit of the invention and the scope of the appended claims.

WO 2004/002608

PCT/US2003/020454

-13-

Table 1

Raw Materials

Raw Material	d ₁₀	d ₅₀	d ₉₀
MgO-Yielding Source			
Magnesium Hydroxide 1 (Dow T-100)	-	6.5	-
Magnesium Oxide 1 (MagChem 50Y)	1.7	3.5	7.0
Magnesium Oxide 2 (MagChem 10-325S)	4.1	15.0	33.7
Magnesium Oxide 3 (M-1 milled -150 mesh)	1.4	13.8	50.4
Magnesium Oxide 4 (MagChem 20)	-	1.0*	-
Talc			
Talc 2 (FDC)	-	8.0*	-
Talc 3 (China 1)	-	10.0*	-
Talc 4 (Quebec)	-	7.0*	-
Spinel			
Spinel 1	-	1.0	-
Kaolin			
Kaolin 1 (K10)	-	3.2	-
Al₂O₃-Yielding Source			
Alumina 1 (Alcan C701)	3.5	5.6-7.0*	10.4
Alumina 2 (A16)	-	0.6	-
Alumina 3 (Alcoa A3000FL)	0.4	1.8-3.5*	4.1
Alumina 4 (Alcoa A1000SGD)	0.36	0.55	1.2
Aluminum Hydroxide 1 (Aluchem AC714)	3.3	5.0	7.9
Aluminum Hydroxide 2 (Aluchem AC400)	2.8	11.0	22.6
SiO₂ Source			
Silica 1 (Imsil A25)	1.0	4.6	16.3
Silica 2 (Imsil A75)	1.2	15.4	56.9
Silica 3 (Silcosil 75)	3.4	24.3	64.2
Silica 4 (Supersil -200 mesh)	-	20.0	-
Silica 5 (Berkeley S5)	-	100#	-
Pore Former			
Pore Former 1 (Asbury 4434 graphite)	-	101	-
Pore Former 2 (Superior 5026 graphite)	-	39	-
Pore Former 3 (Cellulose)	-	-	-
Pore Former 4 (CornStarch)	11	15	20

* Sedigraph; # Sieve analysis

WO 2004/002608

PCT/US2003/020454

-14-

Table 2

Comparative Examples

Example Number	C1	C2	C3	C4
Hold Temp (°C)	1400	1400	1400	1425
Hold Time (hrs)	7	7	7	25
Methocel	3.0	3.0	3.0	5.0
Sodium Stearate	0.5	0.5	0.5	0
Emersol	0	0	0	0.6
Durasyn	0	0	0	6.0
Talc 2	0	0	40.7	0
Talc 3	39.9	0	0	0
Talc 4	0	39.9	0	0
Kaolin 1	16.6	16.6	16.0	0
Alumina 1	15.0	15.0	0	0
Alumina 2	0	0	14.8	0
Alumina 3	0	0	0	0
Alumina 4	0	0	0	34.86
Aluminum Hydroxide 1	15.8	15.8	16.0	0
Magnesium Oxide 1	0	0	0	13.78
Magnesium Oxide 4	0	0	0	0
Silica 1	0	0	0	51.36
Silica 4	12.7	12.7	6.3	0
Silica 5	0	0	6.3	0
Total Intrusion Volume	-	-	-	0.2651
% Porosity	45.0	43.0	47.0	39.6
d ₂₀	3.0	4.0	3.0	1.2
d ₅₀	15.4	12.3	14	2.6
d ₁₀	40.0	35.0	57.5	4.1
(d ₁₀ -d ₂₀)/d ₅₀	2.40	2.52	3.89	1.13
(d ₁₀ -d ₅₀)/d ₅₀	1.60	1.85	3.11	0.60
(d ₅₀ -d ₉₀)/d ₅₀	0.81	0.67	0.79	0.53
d ₂₀ /d ₅₀	0.19	0.33	0.21	0.47
d ₅₀ /(d ₅₀ +d ₂₀)	0.84	0.75	0.82	0.68
S _r	1.87	1.74	1.74	1.70
Permeability (10 ⁻¹² m ²)	-	-	-	0.025
CTE (25-800) (10 ⁻⁷ /°C)	3.4	0.9	1.4	6.7
Transverse I-ratio	0.88	0.90	0.89	0.72

WO 2004/002608

PCT/US2003/020454

-15-

Table 3

Inventive Examples

Example Number	I1	I2	I3	I4	I5
Hold Temp (°C)	1425	1425	1425	1425	1425
Hold Time (hrs)	10	10	10	25	10
Methocel	4.0	4.0	4.0	5.0	4.0
Emersol	1.0	1.0	1.0	0.6	1.0
Durasyn	6.0	6.0	6.0	6.0	10.0
Magnesium Oxide 2	0	0	0	0	0
Magnesium Oxide 4	0	0	0	13.8	10.3
Magnesium Hydroxide 1	16.0	16.0	18.8	0	0
Alumina 1	0	0	32.84	0	28.9
Alumina 4	0	0	0	0	0
Aluminum Hydroxide 1	0	42.8	0	34.9	0
Aluminum Hydroxide 2	42.8	0	0	0	0
Silica 1	41.2	0	48.4	0	50.7
Silica 2	0	0	0	51.4	0
Silica 3	0	41.2	0	0	0
Total Intrusion Volume	0.3406	0.3546	0.3092	0.2781	0.4340
% Porosity	42.7	44.9	41.7	41.2	52.9
d_{30}	5.5	7.5	4.5	12.7	4.0
d_{50}	9.0	16.7	7.3	20.0	7.3
d_{10}	10.5	35.0	10.5	36.6	10.5
$(d_{10}-d_{30})/d_{50}$	0.55	1.65	0.82	1.20	0.89
$(d_{10}-d_{50})/d_{50}$	0.16	1.09	0.43	0.83	0.44
$(d_{50}-d_{30})/d_{50}$	0.39	0.55	0.39	0.36	0.45
d_{30}/d_{50}	0.61	0.45	0.61	0.64	0.55
$d_{50}/(d_{50}+d_{30})$	0.62	0.69	0.62	0.61	0.65
S_r	1.29	1.53	1.47	1.48	1.23
Permeability (10^{-12} m ²)	0.43	1.41	0.37	2.03	0.455
CTE (25-800) ($10^{-7}/^{\circ}\text{C}$)	17.0	16.6	13.0	15.5	12.7
Transverse I-ratio	0.78	0.84	0.80	0.72	0.83
MOR rod (psi)	2326	3003	2256	-	2044

WO 2004/002608

PCT/US2003/020454

-16-

Table 4

Inventive Examples

Example Number	I6	I7	I8	I9
Hold Temp (°C)	1430	1430	1430	1430
Hold Time (hrs)	25	25	25	25
Methocel	4.0	4.0	4.0	4.0
Emersol	0	0	0	0
Durasyn	0	0	0	0
Magnesium Oxide 4	14.0	14.0	14.0	14.0
Alumina 1	35.0	0	35.0	0
Alumina 3	0	35.0	0	35.0
Alumina 4	0	0	0	0
Silica 1	51.0	51.0	51.0	51.0
Silica 4	0	0	0	0
Pore Former 4	10.0	10.0	10.0	10.0
Total Intrusion Volume	-	-	-	-
% Porosity	46.0	44.0	49.0	48.0
d_{50}	3.6	2.0	5.2	2.4
d_{20}	6.9	4.4	8.6	4.6
d_{10}	10.2	6.1	12.7	6.7
$(d_{10}-d_{20})/d_{50}$	0.95	0.93	0.87	0.93
$(d_{10}-d_{50})/d_{50}$	0.48	0.39	0.48	0.45
$(d_{50}-d_{20})/d_{50}$	0.48	0.54	0.40	0.48
d_{20}/d_{50}	0.52	0.45	0.60	0.52
$d_{50}/(d_{50}+d_{90})$	0.66	0.69	0.62	0.66
S_r	1.44	1.52	1.23	1.40
Permeability (10^{-12} m^2)	-	-	-	-
CTE (25-800) ($10^{-7}/^\circ\text{C}$)	5.0	4.35	5.75	5.0
Pressure Drop at 5 g/L soot, measured at 26.25 scfm (kPa)	7.9	8.75	5.15	7.60
Transverse I-ratio	-	-	-	-
MOR rod (psi)	-	-	-	-

WO 2004/002608

PCT/US2003/020454

-17-

Table 5

Pressure Drop Comparison
for Inventive and Commercial DPFs

Sample Type	Inventive Cordierite DFP	Commercial Cordierite DPF	Commercial Cordierite DPF
Soot Loading (g/L)	Pressure Drop (kPa)		
0.00	2.99	3.15	3.41
0.50	3.34	5.73	6.06
0.70	3.43	6.70	7.38
1.00	3.56	7.44	7.97
2.50	4.14	9.26	8.87
4.00	4.80	10.4	10.2
5.00	5.2	11.0	11.3
10.00	7.2	15.2	15.3
% Porosity	49	49	43
$d_{10}(\mu\text{m})$	12.7	24	24
$d_{50}(\mu\text{m})$	8.6	13	13
$d_{90}(\mu\text{m})$	5.2	2	5
$d_{50}/(d_{50}+d_{90})$	0.64	0.86	0.72
S_f	1.23	1.75	1.67

WO 2004/002608

PCT/US2003/020454

-18-

What is claimed:

1. A ceramic filter for trapping and combusting diesel exhaust particulates comprising an end-plugged cordierite honeycomb structure, wherein:
 - a quantity $d_{50}/(d_{50}+d_{90})$ as related to pore size distribution is less than 0.70;
 - a soot loaded permeability factor S_f , as defined by the equation $[d_{50}/(d_{50}+d_{90})]/[\% \text{porosity}/100]$, is less than 1.55; and,
 - a coefficient of thermal expansion (25-800°C) is no greater than $17 \times 10^{-7}/^{\circ}\text{C}$.
2. A ceramic filter according to claim 1 wherein the soot loaded permeability factor S_f is between 0.83 and 1.40.
3. A ceramic filter according to claim 1 wherein a median pore diameter, d_{50} , is at least 4 micrometers and up to 40 micrometers.
4. A ceramic filter according to claim 1 wherein a quantity d_{90}/d_{50} as related to pore size distribution is greater than 0.40.
5. A ceramic filter according to claim 1 wherein a quantity $(d_{50}-d_{90})/d_{50}$ as related to pore size distribution is less than 0.60.
6. A ceramic filter according to claim 1 wherein a porosity is at least 40% by volume, and less than 60%.
7. A ceramic filter according to claim 1 wherein a filter volumetric heat capacity is at least $0.67 \text{ J cm}^{-3} \text{ K}^{-1}$ at 500°C.
8. A method for fabricating a wall-flow filter and comprising:
 - (a) forming a batch of raw materials comprising magnesium oxide, alumina and silica raw materials in combination with extrusion forming aids comprising 2-10% by

WO 2004/002608

PCT/US2003/020454

-19-

weight methylcellulose as binder, and 0.5-1.0% by weight sodium stearate as lubricant;

(b) plasticizing and shaping the batch, wherein the shaping is done through an extrusion die to form a green honeycomb body having an inlet end, an outlet end, and a multiplicity of cells extending from the inlet end to the outlet end;

(c) drying and firing the green honeycomb body at a rate of 15-100°C/hr to a maximum temperature of 1405-1430°C, with a hold of 6-25 hrs.;

(d) plugging a first portion of cells at the inlet end, and a second portion of cells at the outlet end such that each cell is plugged at only one end.

9. The method of claim 23 wherein the batch further includes spinel having a stoichiometry of MgAl_2O_4 .


10. The method of claim 25 wherein the batch further includes a pore former having a median particle diameter of 3-140 micrometers and is selected from the group consisting of graphite, cellulose, starch, polyacrylates and polyethylenes, and combinations thereof.

WO 2004/002608

PCT/US2003/020454

1/6

FIG. 1

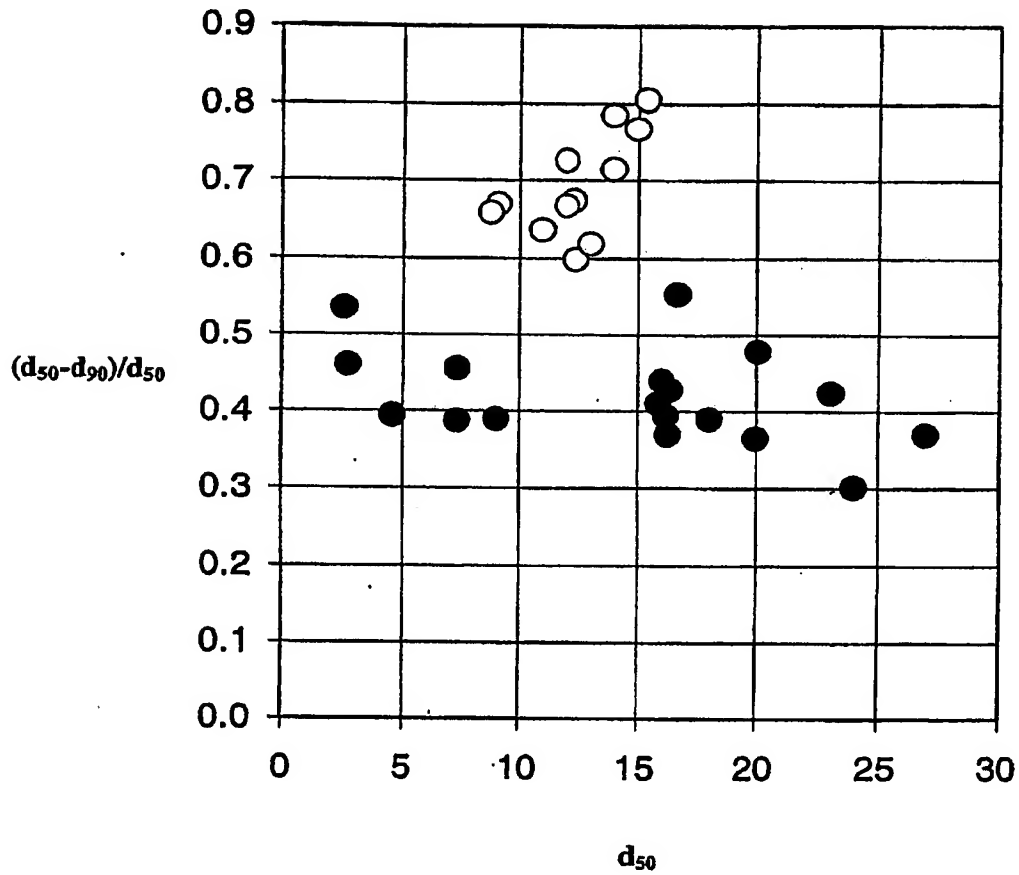


WO 2004/002608

PCT/US2003/020454

2/6

FIG. 2

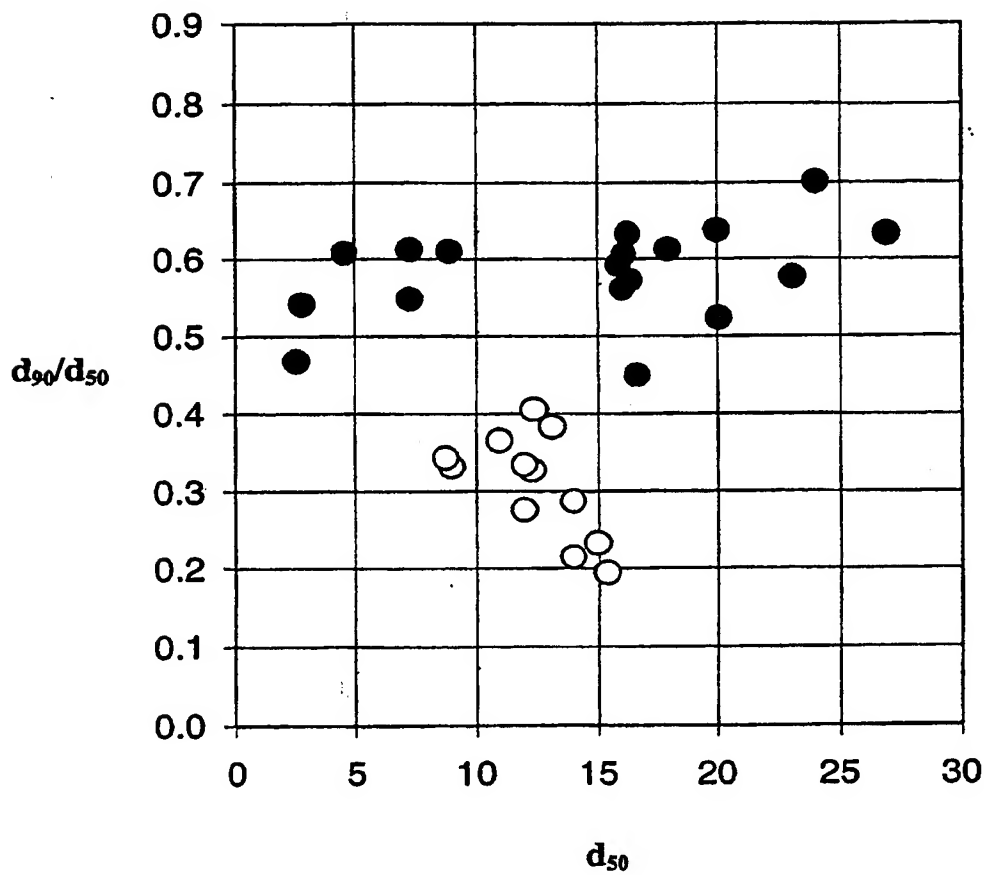


WO 2004/002608

PCT/US2003/020454

3/6

FIG. 3

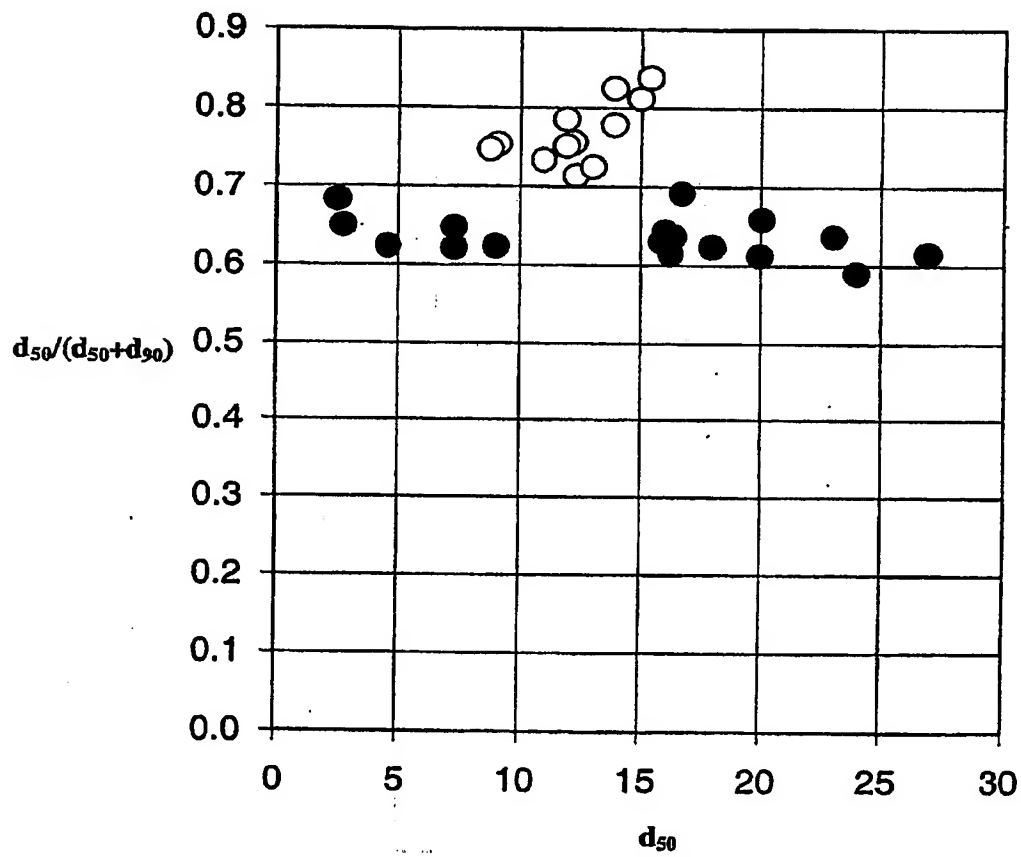


WO 2004/002608

PCT/US2003/020454

5/6

FIG. 5

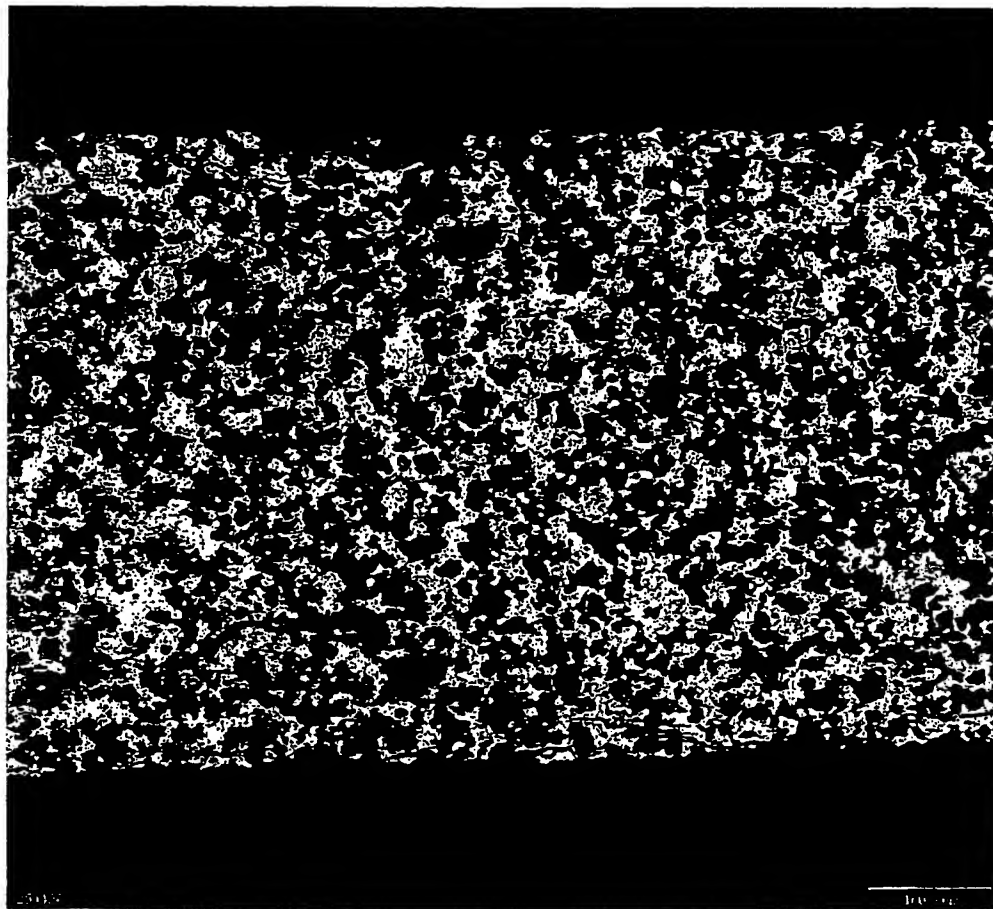


WO 2004/002608

PCT/US2003/020454

6/6

FIG. 6

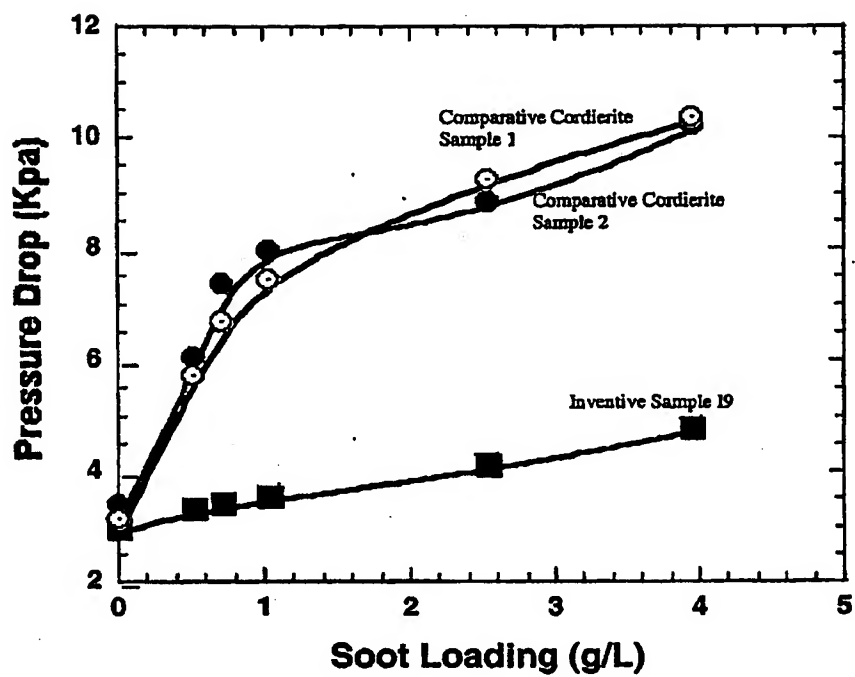

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US03/20454

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : B01D 39/20, 46/00; C04B 35/195

US CL : 55/523, DIG. 30; 501/9, 81, 118, 119, 128; 264/631, 638, 44

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 55/523, DIG. 30; 501/9, 81, 118, 119, 128; 264/631, 638, 44, 653, 669, DIG. 48

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 01/91882 A1 (CORNING INCORPORATED) 06 December 2001 (06.12.2001), page 5, line 15 to page 26, line 32.	1-7
X	US 6,087,281 A (MERKEL) 11 June 2000 (11.06.2000), column 2, line 30 to column 8, line 62.	8-9
—		10
Y		
Y	US 5,185,110 A (HAMAGUCHI et al) 09 February 1993 (09.02.1993), column 2, line 29 to column 13, line 39.	8-10
A	US 6,210,626 B1 (CORNELIUS et al) 03 April 2001 (03.04.2001), column 2, line 50 to column 18, line 67.	1-10
A	US 5,925,156 A (MOTOKI et al) 20 July 1999 (20.07.1999), column 4, lines 28-67.	1-10
A	EP 0 391 321 A2 (ASAHI GLASS COMPANY LTD.) 10 October 1990 (10.10.1990), page 3, lines 41-47.	1-10

☐ Further documents are listed in the continuation of Box C.☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"Z" document member of the same patent family

Date of the actual completion of the international search

10 October 2003 (10.10.2003)

Date of mailing of the international search report

31 OCT 2003

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US

Commissioner for Patents

P.O. Box 1450

Alexandria, Virginia 22313-1450

Facsimile No. (703)305-3230

Authorized officer:

Jason M. Greene

Telephone No. 703-308-0661

Form PCT/ISA/210 (second sheet) (July 1998)